

Considerations for Installation Due to the Specification Changes in Middleware of a MELSOFT Product

■Date of Issue

April 2020

■Relevant Models

MELSOFT series

Thank you for your continued support of MELSOFT series.

We inform you about the considerations due to the specification changes in middleware installed on a MELSOFT product.

1 OVERVIEW OF CHANGES

This chapter explains the specification changes in middleware of a MELSOFT product.

Due to the changes, a problem may occur depending on the combination of versions of MELSOFT products installed on the same personal computer. Check the considerations for installation before using the product.

☞ Page 1 CONSIDERATIONS FOR INSTALLATION

Point

The same middleware are used in multiple MELSOFT products.

MELSOFT products installed on the same personal computer share middleware.


When installing a newer version product, middleware of the existing MELSOFT product installed on the same personal computer is overwritten, thus the product operation is affected.

1.1 SCHEDULE

The specification will be changed for the product released in April 2020 and later.

2 CONSIDERATIONS FOR INSTALLATION

When installing a MELSOFT product of which the specifications in middleware are changed, the following screen appears.

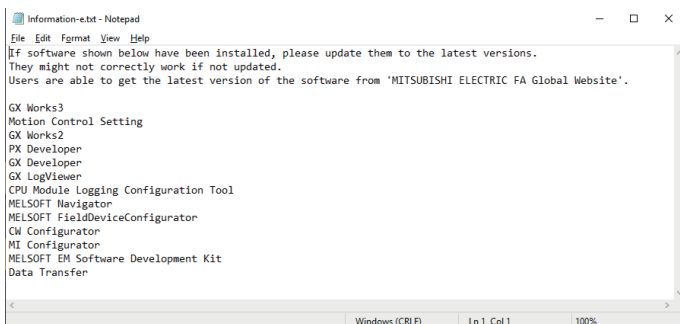

Update the following products installed on the same personal computer to the supported version.

Product name	Supported version
GX Works3	1.060N or later
Motion Control Setting	1.006G or later

FA-A-0301-A

Product name	Supported version
GX Works2	1.591R or later
PX Developer	1.53F or later
GX Developer	8.504A or later
GX LogViewer	1.100E or later
CPU Module Logging Configuration Tool	1.100E or later
MELSOFT Navigator	2.62Q or later
MELSOFT FieldDeviceConfigurator	1.04E or later
CW Configurator	1.011M or later
MI Configurator	1.004E or later
MELSOFT EM Software Development Kit	1.015R or later
Data Transfer	3.41T or later

If using a product of which version is not supported, the following symptoms occur when middleware is updated.

- The product cannot be started.
- The product cannot communicate with a programmable controller.
- A project cannot be saved.



For information on how to obtain a supported version product, please contact your local Mitsubishi Electric sales office or representative.

REVISIONS

Version	Date of Issue	Revision
A	April 2020	First edition

TRADEMARK

The company names, system names and product names mentioned in this bulletin are either registered trademarks or trademarks of their respective companies.

In some cases, trademark symbols such as [™] or [®] are not specified in this bulletin.