

# TECHNICAL BULLETIN

[Issue No.] T05-0007

[Title] Cautions when using the QY22 TRIAC output module

[Relevant Models] QY22

[Page] 1/1

[Date of Issue] June. '03

Thank you for your continued support of Mitsubishi MELSEC-Q Series.


This bulletin provides a caution when using QY22 TRIAC output module.

## 1. Caution

External devices or module may burn out, if a short occurs while the module is in operation.

## 2. Countermeasures

It is recommended to install the IEC60127 sheet I-compliant fuse to each external terminal of the module as follows.

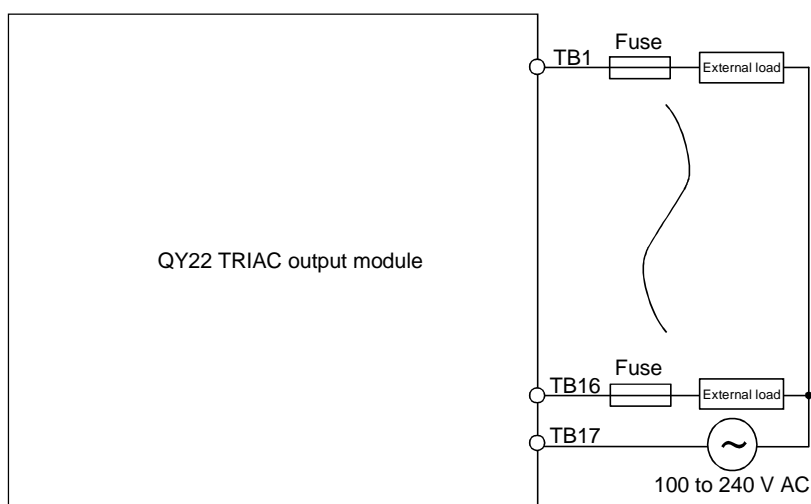

Mitsubishi recommends the following fuses.

Fuse Model	216 02.5	216 002
Rated current	2.5A	2A
Manufacturer	Littelfuse, Inc	

 **MITSUBISHI ELECTRIC CORPORATION**

HEAD OFFICE : 1-8-12, OFFICE TOWER Z 14F HARUMI CHUO-KU 104-6212, JAPAN  
NAGOYA WORKS : 1-14, YADA-MINAMI 5-CHOME, HIGASHI-KU, NAGOYA, JAPAN