

Inrush Current Specifications and Appearance Changes for LE-50PAU Power Amplifier

■Date of Issue

October 2025

■Relevant Models

Tension controllers

Thank you for your continued support of Mitsubishi Electric tension controllers.

We are informing you that the inrush current specifications and the appearance of the LE-50PAU power amplifier will be changed.

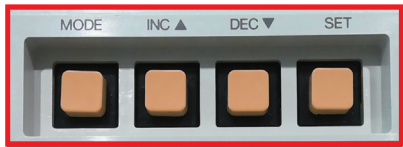



Other general specifications, performance specifications, and functions remain unchanged.

1 RELEVANT MODEL

Product	Model
Power amplifier	LE-50PAU

2 DETAILS ON THE CHANGES

The following table shows the changes to the inrush current specifications and the appearance of the LE-50PAU power amplifier.

Item	Before	After
Inrush current	Up to 50A, 300ms	Up to 30A, for 10ms or less Also, up to 80A, for 1.5ms or less
Appearance of operation key for settings	 <p>Enlarged view</p> 	 <p>Enlarged view</p> 

3 REASON FOR THE CHANGES

Due to parts replacement to ensure stable product supply

4 SCHEDULE

The changes will apply to the products to be manufactured in October 2025 and later.

There may be cases where products before the change and after the change exist in the distribution stage.

CT-A-0023-A

REVISIONS

Version	Date of issue	Revision
A	October 2025	First edition

TRADEMARKS

The company names, system names and product names mentioned in this technical bulletin are either registered trademarks or trademarks of their respective companies.

In some cases, trademark symbols such as '™' or '®' are not specified in this technical bulletin.